

UX10-EX FULLY RUGGED TABLET



- ATEX & IECEx Zone 2/22 explosive atmosphere certified
- 12th Generation Intel® Core™ i5/i7 Processor
- 10.1" Lumibond display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen with digitizer.
- Enhanced enterprise security with optional Intel vPro®, Windows Hello face-authentication camera and multifactor authentication options.
- Versatile I/Os connectivity including Thunderbolt™ 4.
- Support Wi-Fi, 5G, GPS and LTE performance.



5MP webcam / Optional: Windows Hello
face-authentication camera

8MP rear camera

Digitizer Pen


Kensington lock

Thunderbolt™ 4 Type-C

USB 3.2 Gen 2 Type-A

Audio in/out combo

DC in Jack

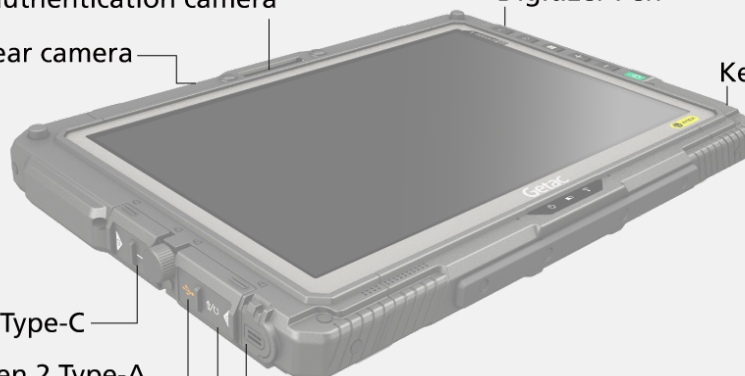

SPECIFICATIONS

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ i5-1235U Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-1245U vPro® Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1255U Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1265U vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Graphics

Intel® UHD Graphics

Display

10.1" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)
Protection film
1,000 nits LumiBond display with
Getac sunlight readable technology

Storage & Memory

8GB DDR4
Optional: 16GB / 32GB DDR4

256GB PCIe NVMe SSD
Optional: 512GB / 1TB PCIe NVMe SSD

Keyboard

Power button
5 tablet programmable buttons

Pointing Device

Touchscreen
Dual mode touchscreen (multi-touch and digitizer)

Audio

Integrated stereo speakers
Integrated dual-array microphone

Expansion Slot

Optional (top side): 1D/2D imager barcode reader
or HF RFID reader

I/O Interface

5MP webcam x 1 ⁱ
8MP auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 1
Optional: SIM card slot x 1 (Micro-SIM, 3FF) ^v
Optional: Windows Hello face-authentication camera
(front-facing) x 1 ⁱ

Communication Interface

Intel® Wi-Fi 6E AX211, 802.11ax
Bluetooth (v5.3) ⁱⁱ
Optional: 4G LTE mobile broadband with integrated GPS ^{iii, iv, v}
Optional: 5G Sub-6 with integrated GPS ^{ii, iv, v}
Optional: Dual SIM (Micro-SIM 3FF and e-SIM) ^{iii, v}

Security Feature

TPM 2.0
Kensington lock
Optional: Intel® vPro® Technology
Optional: HF RFID reader ⁱⁱⁱ
Optional: Windows Hello face-authentication
camera (front-facing) ⁱ
Optional: Absolute Persistence®

Power

AC adapter (65W, 100-240VAC, 50/60 Hz)
Li-ion battery (11.1V, typical 4200mAh; min. 4080mAh) x 1
Optional: High capacity Li-ion battery (10.8V, 9240mAh) x 1

Dimension (W x D x H) & Weight

279 x 194.5 x 23.9mm (10.98" x 7.65" x 0.94") ^{vii}
1.38kg (3.04lbs) ^{vii}

Rugged Feature

MIL-STD-810H certified
IP66 certified
Vibration & 6ft (1.8m) drop resistant ^{viii}
ATEX & IECEx certified

Environmental Specification

Temperature ^{ix} :
- Operating: 0°C to 55°C / 32°F to 131°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Explosion Protection

ATEX/IECEx Zone 2/22
Ex II 3G Ex ic op is IIC T4 Gc
Ex II 3D Ex ic op is IIIC T130°C Dc

Pre-installed Software

Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
Optional: Absolute Secure Endpoint
Optional: Absolute Secure Access

Optional software

Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Device Monitoring System (GDMS)
Getac Monitoring
Getac VGPS Utility ^x

Accessories

Battery (11.1V, typical 4200mAh; min. 4080mAh)
AC adapter (65W, 100-240VAC)
Digitizer pen

Optional:

Battery (11.1V, typical 4200mAh; min. 4080mAh)
High-capacity Li-ion battery (10.8V, 9240 mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
AC adapter (100W, 100-240VAC)
Digitizer pen with tether
Anti-static protection film
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Rotating hand strap with kickstand
Getac DS100 USB-C docking station with AC adapter

Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.
That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.
Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

UX10-EX FULLY RUGGED TABLET

- I. 5M webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- IV. Supports GPS, GLONASS, Galileo, BeiDou and QZSS. Only available in US, UK, EU, AU, and NZ.
- V. Units with 4G/5G option come with an embedded SIM card slot.
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Tested by an independent third-party test lab following MIL-STD-810H.
- IX. Models require either embedded or standalone GPSmodule.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Getac

GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1,
Nangang Rd., Nangang Dist., Taipei City,
115018, Taiwan, R.O.C. Tel : +886 2 2785
7888 globalmarketing@getac.com I
www.getac.com

Copyright © 2025 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only,available specification shall be subjected to
quotation by request.